


LIWAN

E05-SF10307 EXPOSED SHOWER SYSTEM

TECHNICAL DATA

Description	shower combination
Waste drain	Without waste
Drain Attachment	1-1/4" D.
Connection Hoses	Flexible supply hoses included
Water Supply Connections	9/16" - 24 UNEF
Head Shower Width	212 mm
Arm Projection	355 mm
Hand Shower Width	214 mm
Spout Projection	178 mm
Shower Exposed Slide Height	1000-1500 mm
Flow Rate	17.8 l/mn @ 3Bar
Electronics	No
Customizable Product	No
Water Mixing Type	Mechanical mixing
Cartridge Type	Ceramic Mixing Cartridge
Cartridge Size	35 mm
Swivel Spout Presence	No

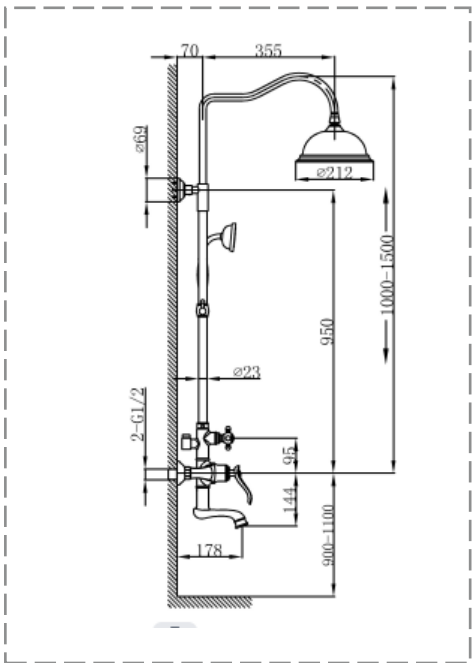


CERTIFICATIONS

- cUPC
- NSF
- Lead Free
- WaterMark (Australia) Certified
- Production managed by a certified Quality System compliant with ISO 9001:2015

TECHNICAL DETAILS

- Maximum working pressure is 5 Bar For pressures above this limit; a pressure reducer must be used.
- The recommended working pressure for optimal installation is 3 Bar
- For lower water pressure consumption please refer to elayabath technical team for the suitable aerators. Water flow could be adjusted as per client requirement
- Please refer to the product's instruction manual and warranty documentation for full details.
- Low flow rates shown assume free-flow conditions and can vary due to installation limitations, pipe layout, or intended use.

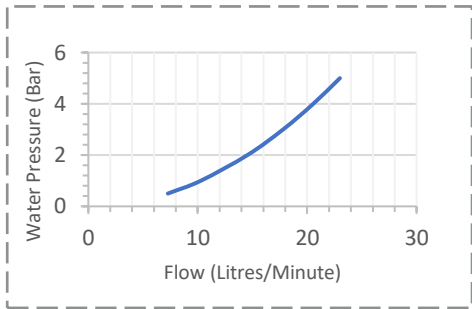

INDICATIONS FOR CLEANING

Use a new microfiber cloth with soapy water for cleaning, then dry with a soft, dry cloth. Avoid using detergents, solvents, alcohol, abrasive sponges, steel wool, or similar materials, as they can cause permanent damage and diminish the product's finish and shine



ACCESSORIES AND FITTINGS

Further matching bathroom accessories and fittings, please refer to elayabath website or design team.

FINISHES CHARACTERISTICS

ELECTOPLATED

A finishing process where a thin layer of metal is deposited onto the mixer surface using an electric current to improve corrosion resistance, durability, and appearance.

Chromium : Elayabath products are finished with chromium plating, a premium coating that includes a base layer of nickel followed by a top layer of chromium. This results in a bright, polished look and ensures strong resistance to corrosion and wear.



P00 – CHROME

PVD COLORS

Elayabath products are finished using the advanced Physical Vapour Deposition (PVD) process. This modern coating method ensures outstanding resistance to corrosion and wear.

During the process, the coating material is heated and vaporized in a vacuum chamber, then deposited onto the product surface. This forms a thin, even, and highly durable protective layer.



P18 – POLISHED CHAMPAGNE

STAINLESS STEEL

Elayabath products come with a solid stainless-steel finish, delivering superior quality and excellent resistance to corrosion and wear.

The finish is created through a specialized brushing technique, resulting in a sleek, modern, and elegant look. It is also simple to clean and maintain.

